




RL 124

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.5300.00	1/2 Bsp F	1/2 Bsp F	1280	45,15	1	✓
Rated Pressure		120 bar - 12 MPa		1750 psi		
Permissible Pressure		135 bar - 13,5 MPa		1950 psi		
Rated Flow		120 l/min		32 USGpm		
Rated Temperature		100 °C		210 °F		
Extensions		30.4000.40-80				



RL124 LANCE AND NOZZLE HOLDER

P/N	Length		Inlet	Outlet	Type	Weight			
	mm	in.				gr	oz		
30.4000.40	400	15,7	1/2 Bsp M	1/4 Npt F	A	745	26,28	1	✓
30.4000.80	800	31,5	1/2 Bsp M	1/4 Npt F	A	1264	44,58	1	✓
30.5018.61			Nipple 1/2 Bsp M	1/4 Npt F	B	55	2	1	
Nozzle holder									
Rated Pressure		120 bar - 12 MPa		1750 psi					
Permissible Pressure		135 bar - 13,5 MPa		1950 psi					
Rated Flow		100 l/min		26,5 USGpm					
Rated Temperature		43 °C		109 °F					
Material		Zinc plated steel							



RL 34 + SW - FOAM GUN - WIDE PASSAGES

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2900.00	+ sw. 1/2 Bsp F	1/2 Bsp F	645	22,75	2	✓
Inlet with swivel						
Rated Pressure		125 bar - 12,5 MPa		1850 psi		
Permissible Pressure		140 bar - 14 MPa		2000 psi		
Rated Flow		80 l/min		21 USGpm		
Rated Temperature		160 °C		320 °F		
Material		Brass				

Brass spray gun, with wider inner passages



RL 82 + SW - SST FOAM GUN

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2800.00	+ sw. 1/2 Bsp F	1/2 Bsp F	616	21,73	2	✓
Inlet with swivel						
Rated Pressure			125 bar - 12,5 MPa		1850 psi	
Permissible Pressure			140 bar - 14 MPa		2000 psi	
Rated Flow			80 l/min		21 USGpm	
Rated Temperature			160 °C		320 °F	
Material			Stainless steel			

Sst spray gun, with wider inner passages



RL 86 + SW - SST AI 316 FOAM GUN

P/N	Inlet	Outlet	Weight			
30.2830.60	+ sw. 1/2 Bsp F	1/2 Bsp F	gr	oz	2	
			626	22,08		
Inlet with swivel						
Rated Pressure	125 bar - 12,5 MPa		1850 psi			
Permissible Pressure	140 bar - 14 MPa		2000 psi			
Rated Flow	80 l/min		21 USGpm			
Rated Temperature	160 °C		320 °F			
Material	Stainless steel A1316					

Sst spray gun, with wider inner passages



RL 16

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0000.20	1/4 Bsp F	1/4 Bsp F	256	9,03	20	✓
30.0000.40	1/4 Bsp M	1/4 Bsp F	256	9,03	20	✓
30.0000.00	3/8 Bsp F	1/4 Bsp F	270	9,52	20	✓
30.0000.50	3/8 Npt F	1/4 Npt F	269	9,49	20	✓
Rated Pressure	160 bar - 16 MPa		2300 psi			
Permissible Pressure	175 bar - 17,5 MPa		2550 psi			
Rated Flow	30 l/min		8 USGpm			
Rated Temperature	100 °C		210 °F			



RL 11

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0800.00	3/8 Bsp F	1/4 Bsp F	434	15,31	20	
30.0800.20	A M22	1/4 Bsp F	431	15,2	20	
Rated Pressure	160 bar - 16 MPa		2300 psi			
Permissible Pressure	175 bar - 17,5 MPa		2550 psi			
Rated Flow	30 l/min		8 USGpm			
Rated Temperature	100 °C		210 °F			



LINEAR 100/170

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0650.00	1/2 Bsp F	1/2 Bsp F	1176	41,48	1	
30.0650.50	1/2 Npt F	1/2 Npt F	1176	41,48	1	
Rated Pressure	170 bar - 17 MPa		2500 psi			
Permissible Pressure	190 bar - 19 MPa		2800 psi			
Rated Flow	100 l/min		27 USGpm			
Rated Temperature	100 °C		210 °F			





RL 20

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0100.20	1/4 Bsp F	1/4 Bsp F	262	9,24	20	✓
30.0100.30	1/4 Bsp M	1/4 Bsp F	256	9,03	20	
30.0100.00	3/8 Bsp F	1/4 Bsp F	272	9,59	20	✓
30.0100.60	3/8 Bsp M	1/4 Bsp F	265	9,3	20	✓
30.0100.40	A M22	1/4 Bsp F	280	9,87	20	
30.0100.50	3/8 Npt F	1/4 Npt F	276	9,73	20	✓

Rated Pressure	200 bar - 20 MPa	2900 psi
Permissible Pressure	220 bar - 22 MPa	3200 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F



RP30/160 - RP80/160 - RP120/160 - PNEUMATIC ON-OFF GUNS

P/N	Rated Flow		Inlet	Outlet	Weight			
	l/min	USGpm			gr	oz		
30.3280.00	30	8	1/4 Bsp F	1/4 Bsp F	548	19,33	1	✓
30.3260.00	80	21	1/2 Bsp F	1/2 Bsp F	1080	38,1	1	
30.3200.00	120	32	3/4 Bsp F	3/4 Bsp F	1862	65,67	1	✓

Rated Pressure	160 bar - 16 MPa	2300 psi
Permissible Pressure	175 bar - 17,5 MPa	2550 psi
Rated Temperature	90 °C	195 °F
Required air pressure	7 bar - 0,7 MPa	101 psi
Compressed air fitting		1/4 Bsp F



RL 204

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.5200.00	3/4 Bsp F	1/2 Bsp F	1331	46,94	1	✓

Rated Pressure	200 bar - 20 MPa	2900 psi
Permissible Pressure	220 bar - 22 MPa	3200 psi
Rated Flow	200 l/min	53 USGpm
Rated Temperature	100 °C	210 °F
Extensions		30.5000.40-80-92



RL 35

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1500.30	3/8 Bsp M	1/4 Bsp F	555	20	15	

Rated Pressure	220 bar - 22 MPa	3200 psi
Permissible Pressure	250 bar - 25 MPa	3650 psi
Rated Flow	35 l/min	9,2 USGpm
Rated Temperature	160 °C	320 °F



RL 204 + SW.5

P/N	Inlet	Outlet	Weight		 
			gr	oz	
30.5230.00	+ sw.5 3/4Bsp F	1/2 Bsp F	1348	47,5	1
Rated Pressure	200 bar - 20 MPa			2900 psi	
Permissible Pressure	220 bar - 22 MPa			3200 psi	
Rated Flow	200 l/min			53 USGpm	
Rated Temperature	100 °C			210 °F	
Extensions			30.5000.40-80-92		





Spray guns up to 32 MPa -4550 psi

RL 26

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1755.15	1/4 Bsp M	1/4 Bsp F	390	13,65	20	
30.1755.00	3/8 Bsp M	1/4 Bsp F	394	13,9	20	✓
30.1755.30	3/8 Bsp F	1/4 Bsp F	404	14,25	20	✓
30.1755.50	3/8 Npt F	1/4 Npt F	400	14,11	20	✓
30.1755.60	A M22	1/4 Bsp F	409	14,43	20	✓
30.1756.00	1/4 Bsp F	1/4 Bsp F	446	15,73	20	✓

With ceramic ball - Suitable for chlore

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F



RL 26 + SW6 / SW8

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1772.00	+ sw.8 3/8 Bsp F	1/4 Bsp F	480	16,93	20	✓
30.1758.00	+ sw.6 3/8 Bsp F	1/4 Bsp F	476	16,79	20	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F



RL 51

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.4100.10	3/8 Bsp F	1/4 Bsp F	684	24,13	8	✓
30.4100.60	3/8 Npt F	1/4 Npt F	684	24,13	8	✓
30.4120.10	+ sw. 3/8 Bsp F	1/4 Bsp F	776	27,37	8	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	50 l/min	13,2 USGpm
Rated Temperature	160 °C	320 °F

With a new, improved mechanical device with double connecting rod



LINEAR 120/280


P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0680.00	1/2 Bsp F	1/2 Bsp F	1224	43,17	1	
30.0680.50	1/2 Npt F	1/2 Npt F	1224	43,17	1	✓

Max. flow rate	120 l/min	32 USGpm
Rated Pressure	280 bar - 28 MPa	4050 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Rated Temperature	100 °C	210 °F



RF 120/280 - FOOT VALVE **NEW**

P/N	Max. flow rate		Inlet	Outlet	Weight			
	l/min	USGpm			gr	oz		
30.5250.00	120	32	3/4 Bsp F	3/4 Bsp F	7499	264,5	1	
30.5250.50	120	32	3/4 Npt F	3/4" Npt F	7499	264,5	1	
Rated Pressure		280 bar - 28 MPa		4050 psi				
Permissible Pressure		310 bar - 31 MPa		4500 psi				
Rated Temperature		90 °C		195 °F				

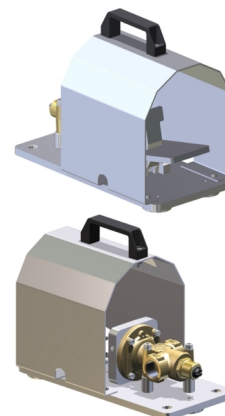

RP 120/280 PNEUMATIC ON-OFF GUN

P/N	Max. flow rate		Inlet	Outlet	Weight			
	l/min	USGpm			gr	oz		
30.3230.00	120	32	3/4 Bsp F	3/4 Bsp F	2398	84,58	1	✓
Rated Pressure		280 bar - 28 MPa		4050 psi				
Permissible Pressure		310 bar - 31 MPa		4500 psi				
Rated Temperature		90 °C		195 °F				
Required air pressure		7 bar - 0,7 MPa		101 psi				
Compressed air fitting				1/4 Bsp F				



RL 36

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1530.00	3/8 Bsp F	1/4 Bsp F	565	20	15	✓
30.1530.50	3/8 Npt F	1/4 Npt F	565	20	15	
Rated Pressure		280 bar - 28 MPa		4000 psi		
Permissible Pressure		310 bar - 31 MPa		4500 psi		
Rated Flow		30 l/min		8 USGpm		
Rated Temperature		160 °C		320 °F		



RL 36 + SW 8

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1550.00	+ sw.8 3/8 Bsp F	1/4 Bsp F	656	23,14	15	✓
Rated Pressure		280 bar - 28 MPa		4000 psi		
Permissible Pressure		310 bar - 31 MPa		4500 psi		
Rated Flow		30 l/min		8 USGpm		
Rated Temperature		160 °C		320 °F		





RL 22

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0400.00	3/8 Bsp F	1/4 Bsp F	475	16,8	20	✓
30.0485.00	3/8 Bsp F	1/4 Bsp F	475	16,8	20	

With ceramic ball +or vit.- Suitable for chlore (30.0485.00)

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



RL 22 + SW8

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0420.00	+ sw.8 3/8 Bsp F	1/4 Bsp F	574	20,25	20	✓

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



LINEAR 3

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0620.00	3/8 Bsp F	1/4 Bsp F	596	21,02	20	✓
30.0620.50	3/8 Npt F	1/4 Npt F	596	21,02	20	✓

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



LINEAR 3 + SW6

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0640.00	+ sw.6 3/8 Bsp F	1/4 Bsp F	658	23,21	20	✓

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



RL 37

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1200.00	3/8 Bsp F	1/4 Bsp F	562	19,82	15	✓
30.1200.50	3/8 Npt F	1/4 Npt F	573	20,2	15	✓
30.1200.80	3/8 Bsp M	1/4 Bsp F	564	19,89	15	✓

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



RL 37 + SW6/+ SW8

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1220.00	+ sw.6 3/8 Bsp F	1/4 Bsp F	564	19,89	15	✓
30.1225.00	+ sw.8 3/8 Bsp M	1/4 Bsp F	648	22,86	15	✓
Rated Pressure			310 bar - 31 MPa		4500 psi	
Permissible Pressure			350 bar - 35 MPa		5000 psi	
Rated Flow			40 l/min		10,5 USGpm	
Rated Temperature			160 °C		320 °F	



RL 37 + SW8-35 SWIVELLING IN- AND OUTLET

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1247.00	+ sw.8 3/8 Bsp F	+sw.35 1/4 Bsp F	711	25,08	15	✓
Rated Pressure			310 bar - 31 MPa		4500 psi	
Permissible Pressure			350 bar - 35 MPa		5000 psi	
Rated Flow			40 l/min		10,5 USGpm	
Rated Temperature			160 °C		320 °F	



RL 30 **NEW**

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2500.00	3/8 Bsp F	1/4 Bsp F	614	21,65	20	✓
30.2500.30	3/8 Bsp M	1/4 Bsp F	620	21,9	20	✓
30.2500.20	A M22	1/4 Bsp F	622	21,94	20	✓
30.2500.25	A M22	A M22	629	22,19	20	✓
30.2500.28	3/8 Bsp F	A M22	740	26	20	
30.2500.50	3/8 Npt F	1/4 Npt F	614	21,65	20	✓
30.2515.00	3/8 Bsp F	1/4 Bsp F	740	26	20	
With ceramic ball - Suitable for chlore (30.2515.00)						
30.2515.50	3/8 Npt F	1/4 Npt F	613	21,62	20	
With ceramic ball - Suitable for chlore (30.2515.00-50)						



Rated Pressure			310 bar - 31 MPa		4500 psi	
Permissible Pressure			350 bar - 35 MPa		5000 psi	
Rated Flow			40 l/min		10,5 USGpm	
Rated Temperature			160 °C		320 °F	

RL 30 + SW6

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2511.00	+ sw.6 3/8 Bsp F	1/4 Bsp F	676	24,04	20	✓
30.2511.20	+sw.6 A M22	1/4 Bsp F	678	23,91	20	✓
Rated Pressure			310 bar - 31 MPa		4500 psi	
Permissible Pressure			350 bar - 35 MPa		5000 psi	
Rated Flow			40 l/min		10,5 USGpm	
Rated Temperature			160 °C		320 °F	





Spray guns up to 32 MPa -4550 psi

VEGA

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2000.00	3/8 Bsp F	1/4 Bsp F	666	23,49	20	✓
30.2000.80	3/8 Bsp M	1/4 Bsp F	669	23,6	20	✓
30.2000.50	3/8 Npt F	1/4 Npt F	664	23,42	50	✓

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



VEGA + SW8 **NEW**

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2030.00	+ sw.8 3/8 Bsp F	1/4 Bsp F	750	26,5	20	✓
30.2030.50	+ sw.8 3/8 Npt F	1/4 Npt F	750	26,5	20	✓
30.2030.12	+ sw.8 3/8 Bsp F	1/4 Bsp F	750	26,5	20	✓

Sw8 sst pin

30.2030.80	+ sw.8 3/8 Bsp M	1/4 Bsp F	747	26,35	20	✓
30.2030.85	+ sw.8 3/8 Bsp M	1/4 Bsp F	747	26,35	20	✓

Sw8 sst pin

30.2035.00	+ sw.8 3/8 Bsp F	1/4 Bsp F	744	26,24	20	✓
------------	------------------	-----------	-----	-------	----	---

Ceram.ball+sst.pin Sw8

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



VEGA INOX

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.3150.00	3/8 Bsp F	1/4 Bsp F	599	21,13	2	✓
30.3150.50	3/8 Npt F	1/4 Npt F	598	21,09	2	✓

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Material	Stainless steel 303	



RL 56

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.4500.10	3/8 Bsp F	1/4 Bsp F	672	23,7	8	✓
30.4500.60	3/8 Npt F	1/4 Npt F	672	23,7	8	✓
30.4520.10	+ sw. 3/8 Bsp F	1/4 Bsp F	762	26,87	8	✓

Rated Pressure	350 bar - 35 MPa	5100 psi
Permissible Pressure	390 bar - 39 MPa	5650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F

With a new, improved mechanical device with double connecting rod

**NOVA 400 INOX STAINLESS STEEL**

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.5650.00	3/8 Bsp F	1/4 Bsp F	601	21,2	2	✓
30.5650.50	3/8 Npt F	1/4 Npt F	601	21,2	2	✓

Rated Pressure	400 bar - 40 MPa	5800 psi
Permissible Pressure	440 bar - 44 MPa	6400 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Material	Stainless steel 303	





RL57 SST GUN

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.4700.00	3/8 Bsp F	1/4 Bsp F	714	25,18	1	✓
30.4700.50	3/8 Npt F	1/4 Npt F	716	25,25	1	✓
Rated Pressure		500 bar - 50 MPa		7250 psi		
Permissible Pressure		560 bar - 56 MPa		8100 psi		
Rated Flow		28 l/min		7,5 USGpm		
Rated Temperature		160 °C		320 °F		
Material		Stainless steel 303				




RP 80/500- PNEUMATIC ON-OFF GUN

P/N	Max. flow rate		Inlet	Outlet	Weight			
	l/min	USGpm			gr	oz		
30.3250.00	80	21	1/2 Bsp F	1/2 Bsp F	2657	93,71	1	✓
Rated Pressure			500 bar - 50 MPa		7250 psi			
Permissible Pressure			560 bar - 56 MPa		8100 psi			
Rated Temperature			90 °C		195 °F			
Required air pressure			7 bar - 0,7 MPa		101 psi			
Compressed air fitting					1/4 Bsp F			



RF 80/500- SST FOOT ON-OFF GUN **NEW**

P/N	Max. flow rate		Inlet	Outlet	Weight			
	l/min	USGpm			gr	oz		
30.5450.00	80	21	1/2 Bsp F	1/2 Bsp F	7593	267,81	1	
30.5450.50	80	21	1/2 Npt F	1/2 Npt F	7593	267,81	1	
Rated Pressure			500 bar - 50 MPa		7250 psi			
Permissible Pressure			560 bar - 56 MPa		8100 psi			
Rated Temperature			90 °C		195 °F			

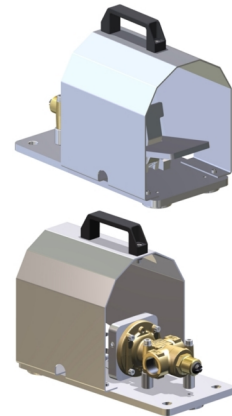

RL 84

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.5400.00	1/2 Bsp F	1/2 Bsp F	1394	49,17	1	✓
Rated Pressure		500 bar - 50 MPa		7250 psi		
Permissible Pressure		560 bar - 56 MPa		8100 psi		
Rated Flow		80 l/min		21 USGpm		
Rated Temperature		100 °C		210 °F		
Extensions		30.5000.40-80-92				




LANCE AND NOZZLE HOLDER FOR RL 84 - RL204

P/N	Length		Inlet	Outlet	Type	Weight			
	mm	in.				gr	oz		
30.5000.40	400	15,7	1/2 Bsp M	1/4 Npt F	A	830	29,27	1	✓
30.5000.80	800	31,5	1/2 Bsp M	1/4 Npt F	A	1427	50,33	1	✓
30.5000.92	1250	50	1/2 Bsp M	1/4 Npt F	A	2036	71,81	1	✓
30.5018.51			Nipple 1/2 Bsp M	1/4 Npt F	B	55	2	1	

Nozzle holder

Rated Pressure	500 bar - 50 MPa	7250 psi
Permissible Pressure	560 bar - 56 MPa	8100 psi
Rated Flow	200 l/min	53 USGpm
Rated Temperature	43 °C	109 °F
Material	Stainless steel	



RL600 SST GUN

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.5800.00	3/8 Bsp F	3/8 Bsp F	991	34,95	1	✓
30.5820.00	3/8 Bsp F	3/8 Bsp F	1039	36,65	1	

Magnetic reed switch I= 0,5 A - V=48V AC/DC - P = 10 VA - 2 m cable

Rated Pressure	600 bar - 60 MPa	8700 psi
Permissible Pressure	660 bar - 66 MPa	9500 psi
Rated Flow	60 l/min	15,8 USGpm
Rated Temperature	100 °C	210 °F
Degree of Protection		IPX3
Protection Class		III
Shoulder rest		30.5060.00

Inlet swivel, n° 30.5840.00



SHOULDER REST

P/N	Length		Couplings	Weight			
	mm	in.		gr	oz		
30.5019.21	300	11,8	M18 × 1,5 mm M	310	10,9	1	
Suitable for RL80							
30.5060.00	300	11,8	1/4 Bsp M	219	7,72	1	✓
Suitable for RL600 - RL124 - RL204 - RL84							





RLW 40 DUMP GUN

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
30.3000.50	400	15,74	3/8 Npt F	1/8 Npt F	948	33,44	20	
30.3100.50	1000	39,4	3/8 Npt F	1/8 Npt F	1362	48,04	10	✓

Rated Pressure	190 bar - 19 MPa	2750 psi
Permissible Pressure	210 bar - 21 MPa	3050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	60 °C	140 °F

High/low pressure gun with coaxial dual barrel



RL 35 SL - SPRAY GUN WITHOUT TRIGGER

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2100.00	3/8 Bsp F	1/4 Bsp F	372	13,12	15	✓
30.2120.00	+ sw.8 3/8 Bsp F	1/4 Bsp F	357	12,6	15	

Rated Pressure	220 bar - 22 MPa	3200 psi
Permissible Pressure	250 bar - 25 MPa	3650 psi
Rated Flow	35 l/min	9,2 USGpm
Rated Temperature	160 °C	320 °F



RL26 - WEEP GUN - BLUE SAFETY LATCH

P/N	Inlet	Outlet	Weep. flow rate		Weight			
			l/min	USGpm	gr	oz		
30.1790.00	3/8 Bsp M	1/4 Bsp F	1,1	0,30	396	13,97	20	✓
30.1790.50	1/4 Npt F	3/8 Npt F	1,1	0,3	400	14,11	20	✓
30.1792.00	+ sw.8 3/8 Bsp F	1/4 Bsp F	1,1	0,30	488	17,21	20	✓
30.1795.00	3/8 Bsp M	1/4 Bsp F	0,6	0,16	380	13,3	20	
30.1794.00	+ sw.8 3/8 Bsp F	1/4 Bsp F	0,6	0,16	485	17,11	20	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F



RL37 - WEEP GUN - BLUE SAFETY LATCH

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1215.00	+ sw.6 3/8 Bsp F	1/4 Bsp F	626	22,1	15	

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5100 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



VEGA - WEEP GUN - BLUE SAFETY LATCH

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2055.00	3/8 Bsp F	1/4 Bsp F	664	23,42	20	✓
30.2055.50	3/8 Npt F	1/4 Npt F	668	23,56	20	✓
30.2064.00	+ sw.8 3/8 Bsp F	1/4 Bsp F	750	26,5	20	✓

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5100 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



RL26 +SW6 - LOW PRESS.WEEP GUN - SAFETY LATCH, GREEN

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1780.00	3/8 Bsp F	1/4 Bsp F	400	14,11	20	✓
30.1782.00	+ sw.6 3/8 Bsp F	1/4 Bsp F	478	16,86	20	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F

Not weeping at high pressure



RL37 + SW8-35 - LOW PRESS.WEEP GUN - SAFETY LATCH, GREEN

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1249.00	+ sw.8 3/8 Bsp F	+sw.35 1/4 Bsp F	711	25,08	15	✓

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Not weeping at high pressure



RL30 + SW6 - LOW PRESS.WEEP GUN - SAFETY LATCH, GREEN

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2580.05	3/8 Bsp F	1/4 Bsp F	614	21,66	20	✓
30.2625.05	+ sw.6 3/8 Bsp F	1/4 Bsp F	677	23,88	20	✓

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Not weeping at high pressure





RL 34 + SW GUN +ARS- B- BALL QUICK COUPLING

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2940.00	+ sw. 1/2 Bsp F	ARS350 B	726	25,2	2	
Inlet with swivel						
30.2960.00	+ sw. 1/2 Bsp F	ARS 178 B	710	25,04	2	✓
Inlet with swivel						
30.2980.00	+ sw. 1/2 Bsp F	ARS 25 B	790	27,86	2	
Inlet with swivel						
Rated Pressure	125 bar - 12,5 MPa		1850 psi			
Permissible Pressure	140 bar - 14 MPa		2000 psi			
Rated Flow	80 l/min		21 USGpm			
Rated Temperature	160 °C		320 °F			
Material	Brass					



RL 82 +SW GUN +ARS- B- BALL QUICK COUPLING

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2840.00	+ sw. 1/2 Bsp F	ARS350 B	704	24,83	2	
Inlet with swivel						
30.2860.00	+ sw. 1/2 Bsp F	ARS 178 B	697	24,58	2	
Inlet with swivel						
30.2880.00	+ sw. 1/2 Bsp F	ARS 25 B	774	27,3	2	
Inlet with swivel						
Rated Pressure	125 bar - 12,5 MPa		1850 psi			
Permissible Pressure	140 bar - 14 MPa		2000 psi			
Rated Flow	80 l/min		21 USGpm			
Rated Temperature	160 °C		320 °F			
Material	Stainless steel					



RL 16 + PL4+ M27 M

P/N	Inlet	Outlet	Hand Grip	Weight			
				gr	oz		
30.0450.00	1/4 Bsp F	M 27 M	PL 4	588	20,74	20	
Rated Pressure	160 bar - 16 MPa		2350 psi				
Permissible Pressure	175 bar - 17,5 MPa		2550 psi				
Rated Flow	30 l/min		8 USGpm				
Rated Temperature	60 °C		140 °F				



RL 160 + S4/R5 + M22

P/N	Inlet	Outlet	Hand Grip	Weight			
				gr	oz		
30.0050.40	1/4 Bsp M	AR1 B M22	S4	581	20,49	25	
30.0050.20	1/4 Bsp F	AR1 B M22	S4	586	20,67	25	
30.0050.00	3/8 Bsp F	AR1 B M22	S4	592	20,88	25	✓
30.0260.00	1/4 Bsp F	AR1 B M22	R5	590	20,81	10	
Rated Pressure	160 bar - 16 MPa		2300 psi				
Permissible Pressure	175 bar - 17,5 MPa		2550 psi				
Rated Flow	30 l/min		8 USGpm				
Rated Temperature	100 °C		210 °F				



RL 11 + S1+ AR6 M22

P/N	Inlet	Outlet	Hand Grip	Weight		
				gr	oz	
30.0940.00	3/8 Bsp F	AR1 B M22	S1	788	27,79	20
30.0940.40	1/4 Bsp M	AR1 B M22	S1	778	27,44	20

Rated Pressure	160 bar - 16 MPa	2300 psi
Permissible Pressure	175 bar - 17,5 MPa	2550 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	100 °C	210 °F



RL 200 + S4 + M22

P/N	Inlet	Outlet	Weight		
			gr	oz	
30.0150.30	1/4 Bsp M	AR1 B M22	550	19,2	25
30.0150.60	3/8 Bsp M	AR1 B M22	594	20,95	25 ✓
30.0150.00	3/8 Bsp F	AR1 B M22	598	21,09	25 ✓
30.0150.40	A M22	AR1 B M22	609	21,48	25

Rated Pressure	200 bar - 20 MPa	2900 psi
Permissible Pressure	220 bar - 22 MPa	3200 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F



RL 35 /36 + S3 + M22

P/N	Inlet	Outlet	Weight		
			gr	oz	
30.1600.00	3/8 Bsp M	AR5/4 B M22	946	33,36	25
30.1611.00	+ sw.8 3/8 Bsp F	AR5/4 B M22	1052	37,1	15

Technical Data: RL35 - RL36



RL 26 + S4 + M22

P/N	Inlet	Outlet	Hand Grip	Weight		
				gr	oz	
30.0761.00	3/8 Bsp M	AR1 B M22	S4	730	25,7	20
30.0760.00	A M22	AR1 B M22	S4	746	26,31	20
30.0755.00	3/8 Bsp M	AR4 B M22	S4	738	26,03	20 ✓
30.0759.00	+ sw.6 3/8 Bsp F	AR4 B M22	S4	807	28,46	20
30.0781.00	3/8 Bsp M	AR5/4 B M22	S3	744	26,24	20

Technical Data: RL26





RL 26 + PL4 + AR4 B M22 EX

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0740.00	3/8 Bsp M	AR4 B M22	706	25,1	20	

Technical Data : RL26



RL 37 + S7 + AR6 M22

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1280.00	3/8 Bsp F	AR6 B M22	886	31,25	15	
30.1280.80	3/8 Bsp M	AR6 B M22	913	32,17	15	
30.1281.00	+ sw.6 3/8 Bsp F	AR6 B M22	946	33,37	15	✓
30.1291.00	+ sw.8 3/8 Bsp M	AR6 B M22	913	32,17	15	

Rated Pressure	280 bar - 28 MPa	4050 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Technical Data : RL37



RL 37 + R5-1000MM+ ARSU

P/N	Inlet	Hose length		Outlet	Weight			
		m	yd		gr	oz		
30.1292.50	3/8 Npt F	1000	39,4	Arsu	1,242	43,81	15	

Rated Pressure	280 bar - 28 MPa	4050 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Technical Data : RL37



RL 300 - S3 370 MM + AR1/4 B M22 **NEW**

P/N	Tube type	Inlet	Outlet	Weight			
				gr	oz		
30.2608.11	Z.pl.steel	3/8 Bsp M	AR1/4 B M22	948	33,44	15	✓
30.2608.30	Z.pl.steel	A M22	AR1/4 B M22	948	33,44	15	
30.2616.00	Stainl. steel	+ sw.6 3/8 Bsp F	AR1/4 B M22	982	34,64	15	

Technical Data : RL30



RL 300 - S3 370 MM + AR5/4 B M22

P/N	Tube type	Inlet	Weight			
			gr	oz		
30.2600.11	Z.pl.steel	3/8 Bsp M	968	34,14	15	✓
30.2601.11	Z.pl.steel	3/8 Bsp F	964	34	15	✓
30.2607.11	Stainl. steel	+ sw.6 3/8 Bsp F	994	35,34	25	✓

Outlet

AR5/4 B M22

Technical Data : RL30



VEGA + RF1 + R5-300MM + AR5 B M22

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2070.00	3/8 Bsp F	AR5/4 B M22	1196	42,2	10	

Lance with flow regulator - Technical Data: Vega



VEGA/RL30 + S3 370MM + AR5 B M22

P/N	Tube type	Inlet	Gun type	Weight			
				gr	oz		
30.2091.00	Stainl. steel	3/8 Bsp F	Vega	1030	36,33	15	
30.2097.00	Z.pl.steel	3/8 Bsp F	Vega	1050	37,03	25	
30.2098.00	Z.pl.steel	3/8 Bsp M	Vega	1069	38	25	✓
30.2083.00	Stainl. steel	+ sw.8 3/8 Bsp M	Vega	1112	39,22	25	
30.3091.60	Stainl. steel	A M22	RL 30	984	34,71	25	

Outlet

AR5/4 B M22

Technical Data : Vega



RL 51 GUN + ARS 23 - B BALL QUICK COUPLING

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.4140.23	+ sw. 3/8 Bsp F	ARS 23 B	1000	35,27	10	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



RL 30 GUN + ARS 23 - B BALL QUICK COUPLING

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2540.30	3/8 Bsp F	ARS 23 B	880	31,1	4	

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F





SPRAY GUNS + ARS350 - B BALL QUICK COUPLING SST

P/N	Gun type	Inlet	Outlet	Weight		
				gr	oz	
30.2540.00	RL 30	A M22	ARS350 B	760	26,8	8
30.2040.00	Vega	+ sw.8 3/8 Bsp F	ARS350 B	887	31,29	8

With ceramic ball - Suitable for chore - Sw8 with sst. pin. (30.2040.00)

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



RL 36 GUN +ARS25- B-KW BALL QUICK COUPLING

P/N	Inlet	Outlet	Mat.	Type	Weight		
					gr	oz	
30.1535.00	A M22	ARS 25 B	St. steel	Y	900	32	2
30.1538.00	+sw.6 A M22	ARS 25 B	St. steel	Y	900	32	2 ✓

Rated Pressure	280 bar - 28 MPa	4000 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F
Material		Brass



RL 30 GUN +ARS25- B-KW BALL QUICK COUPLING

P/N	Inlet	Outlet	Mat.	Type	Weight		
					gr	oz	
30.2540.60	3/8 Bsp F	ARS 25 B	Brass	X	900	32	4
30.2619.00	A M22	ARS 25 B	Brass	Y	830	29,27	15

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



SST VEGA GUN +ARS25- B-KW BALL QUICK COUPLING

P/N	Inlet	Outlet	Mat.	Weight		
				gr	oz	
30.3140.60	3/8 Bsp F	ARS 25 B	St. steel	805	28,39	1

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Material		Stainless steel 303



RL 56 + SW + AR8 + S3 350 LANCE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
30.4520.15	-	-	+ sw. 3/8 Bsp F	AR 8 B M24	816	28,78	8	✓
40.0262.00	1050	41,3	AR8 "A"	1/4 Npt F	898	31,67	8	
40.0262.50	1050	41,3	AR8 "A"	1/8 Npt F	897	31,64	8	

Rated Pressure	350 bar - 35 MPa	5100 psi
Permissible Pressure	390 bar - 39 MPa	5650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F



RL600SST. AI303 - LANCE 140 MM +AR9 'B' -M24

P/N	Inlet	Outlet	Length		Weight			
			mm	in.	gr	oz		
30.5830.00	3/8 Bsp F	AR9 'B' -M24	140	5,50	1282	45,22	1	

Rated Pressure	600 bar - 60 MPa	8700 psi
Permissible Pressure	660 bar - 66 MPa	9500 psi
Rated Flow	60 l/min	15,8 USGpm
Rated Temperature	100 °C	210 °F
Material	Stainless steel 303	
Shoulder rest	30.5060.00	





GUN RL11 WITH LANCE- S1- 700MM+ PROTECTION+NOZZLE HOLDER

P/N	Inlet	Length		Hand Grip	Outlet	Weight		
		mm	in.			gr	oz	
30.0970.00	3/8 Bsp F	700	27,5	S1	1/4 Npt F	916	32,31	20
Rated Pressure		160 bar - 16 MPa				2300 psi		
Permissible Pressure		175 bar - 17,5 MPa				2550 psi		
Rated Flow		30 l/min				8 USGpm		
Rated Temperature		100 °C				210 °F		



GV 3 + DIFFERENT SPRAY GUNS

P/N	Length		Inlet	Nozzle	Gun type	Weight		
	mm	in.				gr	oz	
30.0180.15	768	30,22	3/8 Bsp F	1,5	RL20 3/8Bsp F	1262	44,51	5
30.1580.15	768	30,22	+ sw. 3/8 Bsp F	1,5	RL 36+sw 3/8	1656	58,41	5
30.2920.35	768	30,22	+ sw.5 1/2 Bsp F	3,5	RL34-sw 1/2 Bsp F	1670	58,9	5
30.5380.45	768	30,22	1/2 Bsp F	4,5	RL124	2311	81,51	5
30.6485.70	768	30,22	1/2 Bsp F	7,0	RB65 100l/min	2072	73,08	5
Rated Pressure		180 bar - 18 MPa				2600 psi		
Permissible Pressure		200 bar - 20 MPa				2900 psi		
Rated Temperature		60 °C				140 °F		



RL300 +SW8 3/8BSP -R5 +LD12 - FOAM LANCE +AD+PROTEC.

P/N	Max. flow rate		Nozzle	Col.	Outlet	Weight		
	l/min	USGpm				gr	oz	
30.2700.18	10	2,6	1,8	Black	1/4 Npt F	1684	59,4	2
With ceramic ball + Sw8 pin sst.								
30.2700.21	15	4	2,1	Red	1/4 Npt F	1687	59,5	2
With ceramic ball.Sw8 pin sst.								
Rated Pressure		200 bar - 20 MPa				2900 psi		
Permissible Pressure		220 bar - 22 MPa				3200 psi		
Rated Flow		25 l/min				6,5 USGpm		
Rated Temperature		60 °C				140 °F		
Inlet						+ sw.8 3/8 Bsp M		
Injector						21.0600.12-14-18		



Injector 21.0600.12 is compulsory for foam lance LS12 30.2700.18
Injector 21.0600.14 is compulsory for foam lance LS12 30.2700.21

RL300 +SW8 3/8BSP +LD12 - FOAM LANCE +AD+PROTEC.

P/N	Max. flow rate		Nozzle	Col.	Outlet	Weight		
	l/min	USGpm				gr	oz	
30.2710.18	10	2,6	1,8	Black	1/4 Npt F	1456	51,35	2
With ceramic ball-Sw8 pin sst.								
30.2710.21	15	4	2,1	Red	1/4 Npt F	1456	51,35	2
With ceramic ball-Sw8 pin sst.								
Rated Pressure		200 bar - 20 MPa				2900 psi		
Permissible Pressure		220 bar - 22 MPa				3200 psi		
Rated Flow		25 l/min				6,5 USGpm		
Rated Temperature		38 °C				100 °F		
Inlet						+ sw.8 3/8 Bsp M		
Injector						21.0600.12-14-18		



Injector 21.0600.12 is compulsory for foam lance LS12 30.2710.18
Injector 21.0600.14 is compulsory for foam lance LS12 30.2710.21

RL26 GUN 1/4F BSP+CERAM.BALL+700MM SST LANCE

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1757.00	1/4 Bsp F	1/4 Npt F	772	27,23	10	
Rated Pressure	250 bar - 25 MPa		3650 psi			
Rated Flow	30 l/min		8 USGpm			
Rated Temperature	160 °C		320 °F			
Length	700 mm		27,5 in.			
Tube type			1/4 Sst.			
Gun type			RL 26 1/4Bsp F+ceram.ball			

Wear to chemical detergent



GUN RL26+SW8 WITH LANCE- EVER WEeping

P/N	Inlet	Length		Weep. flow rate		Weight			
		mm	in.	l/min	USGpm	gr	oz		
30.0767.00	+ sw.8 3/8 Bsp F	700	27,5	1,1	0,30	962	33,93	10	✓
30.0767.06	+ sw.8 3/8 Bsp F	700	27,5	0,6	0,16	966	34,07	10	✓
30.0768.00	+ sw.8 3/8 Bsp F	900	35,4	1,1	0,30	1058	37,32	10	
30.0768.06	+ sw.8 3/8 Bsp F	900	35,4	0,6	0,16	1058	37,32	10	
Rated Pressure	250 bar - 25 MPa			3650 psi					
Permissible Pressure	280 bar - 28 MPa			4050 psi					
Rated Flow	30 l/min			8 USGpm					
Rated Temperature	160 °C			320 °F					
Outlet	1/4 Npt F								



RL26 + SW6 LOW PRESSURE WEEP GUN +R5-700 SST LANCE

P/N	Inlet	Length		Outlet	Weight			
		mm	in.		gr	oz		
30.1796.00	+ sw.6 3/8 Bsp F	700	27,5	1/4 Npt F	958	33,79	10	✓
Rated Pressure	250 bar - 25 MPa		3650 psi					
Permissible Pressure	280 bar - 28 MPa		4050 psi					
Rated Flow	30 l/min		8 USGpm					
Rated Temperature	160 °C		320 °F					

Not weeping at high pressure



GUN + LANCE FOR FOAM BRUSH

P/N	Gun type	Inlet	Outlet	Weight			
				gr	oz		
30.0771.00	RL 26 weep	+ sw.8 3/8 Bsp F	1/4 Bsp M	927	33	10	
Rated Pressure	250 bar - 25 MPa		3650 psi				
Permissible Pressure	280 bar - 28 MPa		4050 psi				
Rated Flow	30 l/min		8 USGpm				
Rated Temperature	160 °C		320 °F				
Length	700 mm		27,5 in.				
Tube type			1/4 Sst.				





RL37 + SW8-35 - LOW PRESSURE WEEP GUN +R5 SST LANCE

P/N	Inlet	Length		Outlet	Weight			
		mm	in.		gr	oz		
30.1307.10	+ sw.8 3/8 Bsp F	700	27.5	1/4 Bsp M	1165	41,09	10	✓

Rated Pressure	280 bar - 28 MPa	4050 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Not weeping at high pressure



RL37 + SW8-35 +SST R5 +PROTECTION+NOZZLE HOLDER

P/N	Inlet	Length		Outlet	Weight			
		mm	in.		gr	oz		
30.1262.10	+ sw.8 3/8 Bsp F	1200	47,2	1/4 Npt F	1394	49,17	10	

Rated Pressure	280 bar - 28 MPa	4050 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



RL 30 - S3 500 MM -1/4 F NPT

P/N	Length		Tube type	Weight			
	mm	in.		gr	oz		
30.2610.11	500	19,7	1/4 Sst.	1002	35,34	20	✓

Inlet	3/8 Bsp F
Outlet	1/4 Npt F

Technical Data : RL30



RL 56 + AL-F 39MPa LANCE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
30.4560.00	800	31,5	3/8 Bsp F	1/4 Npt F	1244	43,88	8	
30.4561.00	1050	41,3	3/8 Bsp F	1/4 Npt F	1244	43,88	8	
30.4562.00	1200	47,24	3/8 Bsp F	1/4 Npt F	1450	51,3	8	

Rated Pressure	350 bar - 35 MPa	5100 psi
Permissible Pressure	390 bar - 39 MPa	5650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F



RL 56 + S3 350 LANCE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
30.4550.09	800	34	3/8 Bsp F	1/4 Npt F	1118	39,43	8	✓
30.4570.09	800	34	+ sw. 3/8 Bsp F	1/4 Npt F	1205	42,5	8	
30.4550.10	1050	41,3	3/8 Bsp F	1/4 Npt F	1350	47,62	8	
30.4550.60	1050	41,3	3/8 Npt F	1/4 Npt F	1356	47,83	8	✓
30.4550.12	1200	51	3/8 Bsp F	1/4 Npt F	1432	50,51	8	
30.4550.62	1200	51	3/8 Npt F	1/4 Npt F	1432	50,51	8	
30.4570.12	1200	51	+ sw. 3/8 Bsp F	1/4 Npt F	1486	52,41	8	

Rated Pressure	350 bar - 35 MPa	5100 psi
Permissible Pressure	390 bar - 39 MPa	5650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F



RL 57 +AF-L 55MPA LANCE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
30.4740.00	1050	41,3	3/8 Bsp F	1/4 Npt F	1592	56,15	2	
30.4742.00	1200	51	3/8 Bsp F	1/4 Npt F	1820	64,19	2	

Rated Pressure	500 bar - 50 MPa	7250 psi
Permissible Pressure	550 bar - 55 MPa	8000 psi
Rated Flow	28 l/min	7,5 USGpm
Rated Temperature	160 °C	320 °F
Material	Stainless steel 303	



RL 57 +S3 50MPA LANCE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
30.4730.00	1050	41,3	3/8 Bsp F	1/4 Npt F	1720	60,67	2	
30.4730.50	1050	41,3	3/8 Npt F	1/4 Npt F	1720	60,67	2	
30.4732.00	1200	51	3/8 Bsp F	1/4 Npt F	1820	64,19	2	
30.4732.50	1200	51	3/8 Npt F	1/4 Npt F	1820	64,19	2	

Rated Pressure	500 bar - 50 MPa	7250 psi
Permissible Pressure	550 bar - 55 MPa	8000 psi
Rated Flow	28 l/min	7,5 USGpm
Rated Temperature	160 °C	320 °F
Material	Stainless steel 303	



RL600 STAINLESS STEEL GUN + S6 LANCE

P/N	Inlet	Outlet	Length		Weight			
			mm	in.	gr	oz		
30.5880.00	3/8 Bsp F	1/4 Npt F	800	31,5	2128	75,06	1	✓

Rated Pressure	600 bar - 60 MPa	8700 psi
Permissible Pressure	660 bar - 66 MPa	9500 psi
Rated Flow	60 l/min	15,8 USGpm
Rated Temperature	100 °C	210 °F
Degree of Protection	IPX3	
Protection Class	III	
Shoulder rest	30.5060.00	

