



LS11 - LANCE WITH INLET STRAINER - STAINLESS STEEL TUBE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
40.0110.14	700	27,5	1/4 Bsp M	1/4 Npt F	508	17,92	8	✓

Rated Pressure	180 bar - 18 MPa	2600 psi
Permissible Pressure	200 bar - 20 MPa	2900 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F

Lances with tip protector and nozzle holder.
Suitable for car-wash



S3 - VENTED GRIP - ZINC-PLATED TUBE **NEW**

P/N	Inlet	Length		Outlet	Weight			
		mm	in.		gr	oz		
40.0535.00	1/4 Bsp M	500	19,7	1/4 Npt F	456	16,08	20	✓
40.0755.00	1/4 Bsp M	700	27,5	1/4 Npt F	554	19,54	20	✓
40.0955.00	1/4 Bsp M	900	35,4	1/4 Npt F	655	23,1	20	✓
40.0955.08	1/4 Npt M	900	35,4	1/4 Npt F	590	20,81	20	
40.0955.50	1/4 Bsp M	900	35,4	1/8 Npt F	655	23,1	20	
40.1255.00	1/4 Bsp M	1200	47,2	1/4 Npt F	832	29,35	20	✓
40.1255.50	1/4 Bsp M	1200	47,2	1/8 Npt F	832	29,35	20	
40.1555.00	1/4 Bsp M	1500	59	1/4 Npt F	1085	38,27	10	✓
40.1555.50	1/4 Bsp M	1500	59	1/8 Npt F	1085	38,27	10	
40.1755.00	1/4 Bsp M	1700	66,9	1/4 Npt F	1224	43,17	10	✓
40.2055.00	1/4 Bsp M	2000	78,7	1/4 Npt F	1360	47,97	10	✓
40.2055.50	1/4 Bsp M	2000	78,7	1/8 Npt F	1360	47,97	10	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Lances with tip protector and nozzle holder.
1/8Npt F outlet available on request.



S3 - VENTED GRIP - STAINLESS STEEL TUBE **NEW**

P/N	Inlet	Length		Outlet	Weight			
		mm	in.		gr	oz		
40.0765.00	1/4 Bsp M	700	27,5	1/4 Npt F	488	17,21	20	✓
40.0965.00	1/4 Bsp M	900	35,4	1/4 Npt F	584	20,6	20	✓
40.0965.08	1/4 Npt M	900	35,4	1/4 Npt F	586	20,69	20	
40.1265.00	1/4 Bsp M	1200	47,2	1/4 Npt F	837	29,52	20	✓
40.1565.00	1/4 Bsp M	1500	59	1/4 Npt F	961	33,9	10	✓
40.1765.00	1/4 Bsp M	1700	66,9	1/4 Npt F	1039	36,65	10	
40.2065.00	1/4 Bsp M	2000	78,7	1/4 Npt F	1172	41,34	10	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Lances with tip protector and nozzle holder.



S3 -350 VENTED GRIP - STAINLESS STEEL TUBE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
40.0258.00	800	31,4	1/4 Bspt M	1/4 Npt F	564	19,89	8	✓
40.0258.50	800	31,4	1/4 Npt M	1/4 Npt F	562	19,82	8	
40.0261.00	1050	41,3	1/4 Bspt M	1/4 Npt F	801	28,25	8	✓
40.0261.50	1050	41,3	1/4 Npt M	1/4 Npt F	800	28,22	8	
40.0264.50	1200	47,2	1/4 Npt M	1/4 Npt F	850	29,98	8	✓
Rated Pressure			350 bar - 35 MPa		5100 psi			
Permissible Pressure			390 bar - 39 MPa		5650 psi			
Rated Flow			30 l/min		8 USGpm			
Rated Temperature			160 °C		320 °F			

Lances with tip protector and nozzle holder. Blue insulated grip.



S3 -55 MPA VENTED GRIP - STAINLESS STEEL TUBE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
40.0240.00	1200	47,2	1/4 Bsp M	1/4 Npt F	1135	40,03	1	✓
Rated Pressure		500 bar - 50 MPa		7250 psi				
Permissible Pressure		550 bar - 55 MPa		8000 psi				
Rated Flow		40 l/min		10,5 USGpm				
Rated Temperature		160 °C		320 °F				
Material		Stainless steel						

Lances with tip protector and nozzle holder. Red insulated grip.



S6- VENTED GRIP - STAINLESS STEEL TUBE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
40.0160.12	1200	47,3	3/8 Bsp M	1/4 Npt F	1763	62,18	1	✓
40.0160.80	800	31,5	3/8 Bsp M	1/4 Npt F	1174	41,41	1	✓
Rated Pressure			600 bar - 60 MPa		8700 psi			
Permissible Pressure			660 bar - 66 MPa		9500 psi			
Rated Flow			60 l/min		15,8 USGpm			
Rated Temperature			100 °C		210 °F			

Lances with nozzle holder.



SIDE GRIP FOR LANCE S3

P/N	Outlet	Weight			
		gr	oz		
41.0795.00	M 10	82	2,89	25	✓





S7 - RECTANGULAR GRIP - ZINC-PLATED TUBE

P/N	Length		Outlet	Weight		
	mm	in.		gr	oz	
40.4500.00	500	19,7	1/4 Npt F	464	16,37	20 ✓
40.4700.00	700	27,5	1/4 Npt F	564	19,9	20
40.4900.00	900	35,4	1/4 Npt F	658	23,21	20

Rated Pressure	280 bar - 28 MPa	4050 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet		1/4 Bsp M

Lances with tip protector and nozzle holder.
1/8Npt F outlet available on request.



LANCE R5 - ROUND GRIP - ZINC PLATED TUBE **NEW**

P/N	Inlet	Length		Outlet	Weight		
		mm	in.		gr	oz	
40.2150.00	1/4 Bsp M	500	19,7	1/4 Npt F	440	15,52	25 ✓
40.5500.05	1/4 Npt M	500	19,7	1/4 Npt F	440	15,52	25
40.5600.05	1/4 Npt M	600	23,62	1/4 Npt F	440	15,52	25
40.2170.00	1/4 Bsp M	700	27,5	1/4 Npt F	592	20,88	25 ✓
40.5700.05	1/4 Npt M	700	27,5	1/4 Npt F	592	20,88	25
40.2190.00	1/4 Bsp M	900	35,4	1/4 Npt F	692	24,41	25 ✓
40.5900.05	1/4 Npt M	900	35,4	1/4 Npt F	670	23,6	25
40.2220.00	1/4 Bsp M	1200	47,2	1/4 Npt F	842	29,69	25

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Lances with tip protector and nozzle holder.
1/8Npt F outlet available on request.



LANCE R5 - ROUND GRIP - STAINLESS STEEL TUBE **NEW**

P/N	Inlet	Length		Outlet	Weight		
		mm	in.		gr	oz	
40.5502.05	1/4 Npt M	500	20,41	1/4 Npt F	521	18,38	25
40.5705.00	1/4 Bsp M	700	27,5	1/4 Npt F	521	18,38	25 ✓
40.5705.05	1/4 Npt M	700	27,5	1/4 Npt F	532	18,76	25
40.5905.00	1/4 Bsp M	900	35,4	1/4 Npt F	600	21,16	25 ✓
40.5905.05	1/4 Npt M	900	35,4	1/4 Npt F	628	22,15	25
40.5905.50	1/4 Bsp M	900	35,4	1/8 Npt F	600	21,16	25

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Lances with tip protector and nozzle holder.
1/8 Npt F outlet available on request




LANCE R5 - ROUND GRIP - STAINLESS STEEL

P/N	Length		Casing colour	Outlet	Weight			
	mm	in.			gr	oz		
40.2160.00	500	19,7	Black	1/4 Npt F	414	14,6	10	
40.2160.30	500	19,7	Red	1/4 Npt F	408	14,39	10	
40.2160.60	500	19,7	Blue	1/4 Npt F	398	14,04	10	
40.2300.00	1000	39,4	Black	1/4 Npt F	620	21,87	10	
40.2300.30	1000	39,4	Red	1/4 Npt F	611	21,55	10	
40.2300.60	1000	39,4	Blue	1/4 Npt F	608	21,44	10	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet		1/4 Bsp M
Couplings		Stainless steel AISI303
Tube type		1/4 Sst.
Type		Straight

Lances with tip protector and nozzle holder.
1/8 Npt F outlet available on request



LANCE ML - ROUND GRIP - ZINC PLATED TUBE **NEW**

P/N	Inlet	Length		Outlet	Weight			
		mm	in.		gr	oz		
40.6200.00	1/4 Bsp M	1200	47,24	1/4 Npt F	982	34,63	25	
40.6200.05	1/4 Npt M	1200	47,24	1/4 Npt F	982	34,63	25	
40.6500.00	1/4 Bsp M	1500	59	1/4 Npt F	1211	42,71	10	
40.6500.05	1/4 Npt M	1500	59	1/4 Npt F	1207	42,57	10	
40.6700.00	1/4 Bsp M	1700	66,9	1/4 Npt F	1354	47,76	10	
40.6700.05	1/4 Npt M	1700	66,9	1/4 Npt F	1380	48,6	10	
40.7000.00	1/4 Bsp M	2000	78,5	1/4 Npt F	1455	51,32	10	
40.7000.05	1/4 Npt M	2000	78,5	1/4 Npt F	1455	51,32	10	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Lances with tip protector and nozzle holder.



LANCE ML - ROUND GRIP - STAINLESS STEEL TUBE **NEW**

P/N	Inlet	Length		Outlet	Weight			
		mm	in.		gr	oz		
40.6205.00	1/4 Bsp M	1200	47,2	1/4 Npt F	872	30,76	25	✓
40.6205.05	1/4 Npt M	1200	47,2	1/4 Npt F	872	30,76	25	
40.6505.00	1/4 Bsp M	1500	59	1/4 Npt F	1080	38,09	10	✓
40.6705.00	1/4 Bsp M	1700	66,9	1/4 Npt F	1300	45,8	10	
40.7005.00	1/4 Bsp M	2000	78,7	1/4 Npt F	1295	45,68	10	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Lances with tip protector and nozzle holder.





LANCE PFL - MOULDED GRIP - ZINC-PLATED TUBE **NEW**

P/N	Length		Type	Outlet	Weight			
	mm	in.			gr	oz		
40.7500.00	500	19,8	Bent	1/4 Npt F	390	13,76	25	✓
40.7502.00	500	19,8	Straight	1/4 Npt F	398	14,04	25	
40.7700.00	700	27,5	Bent	1/4 Npt F	488	17,21	25	✓
40.7700.50	700	27,5	Bent	1/8 Npt F	488	17,21	25	
40.7900.00	900	35,4	Bent	1/4 Npt F	599	21,13	25	✓
40.7900.50	900	35,4	Bent	1/8 Npt F	599	21,13	25	
40.8200.00	1200	47,2	Bent	1/4 Npt F	853	30,09	25	✓
40.8500.00	1500	59	Bent	1/4 Npt F	1024	36,12	10	✓
40.8700.00	1700	66,9	Bent	1/4 Npt F	1116	39,36	10	✓
40.9000.00	2000	78,7	Bent	1/4 Npt F	1319	46,52	10	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet		1/4 Bsp M

Lances with tip protector and nozzle holder.
Lances with outlet 1/8Npt F available on request.



LANCE PFL - MOULDED GRIP - SST TUBE

P/N	Length		Type	Outlet	Weight			
	mm	in.			gr	oz		
40.7518.00	500	19,8	Straight	1/4 Npt F	346	12,2	25	✓
40.7722.00	700	27,5	Bent	1/4 Npt F	434	15,31	25	✓
40.9025.00	900	35,4	Bent	1/4 Npt F	507	17,88	25	
40.8216.00	1200	47,2	Bent	1/4 Npt F	738	26,03	10	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet		1/4 Bsp M
Tube type		Stainl. steel

Lances with tip protector and nozzle holder.
Lances with outlet 1/8Npt F available on request.



LANCE PFL - STRAIGHT - ZINC-PLATED TUBE

P/N	Length		Hand Grip	Outlet	Weight			
	mm	in.			gr	oz		
40.7300.22	300	11,8	1-PFL	1/4 Bsp M	237	8,36	25	✓
40.7450.22	450	17,7	1-PFL	1/4 Bsp M	316	11,15	25	✓
40.7504.22	500	19,7	1-PFL	1/4 Bsp M	349	12,31	25	
40.7601.22	600	23,6	1-PFL	1/4 Bsp M	396	13,97	25	
40.7705.22	700	27,5	1-PFL	1/4 Bsp M	452	15,94	25	✓
40.7902.22	900	35,4	1-PFL	1/4 Bsp M	554	19,54	25	✓
40.8211.22	1200	47,2	2 -PFL	1/4 Bsp M	818	28,85	25	✓
40.8511.22	1500	59	2 -PFL	1/4 Bsp M	948	33,44	10	
40.9004.22	2000	78,7	3-PFL	1/4 Bsp M	1288	45,43	10	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet		1/4 Bsp M
Tube type		1/4 z.pl.



LANCE PFL - STRAIGHT - STAINLESS STEEL TUBE

P/N	Length		Hand Grip	Outlet	Weight			
	mm	in.			gr	oz		
40.7460.22	450	17,7	1-PFL	1/4 Bsp M	287	10,12	25	✓
40.7710.22	700	27,5	1-PFL	1/4 Bsp M	396	13,97	25	
40.8010.22	800	31,5	2 -PFL	1/4 Bsp M	670	23,7	1	
40.9010.22	900	35,4	1-PFL	1/4 Bsp M	479	16,89	25	✓
40.9015.22	900	35,4	2 -PFL	1/4 Bsp M	700	24,7	25	
40.8220.22	1200	47,2	1-PFL	1/4 Bsp M	588	20,74	10	
40.8215.22	1200	47,2	2 -PFL	1/4 Bsp M	684	24,13	25	✓
40.8512.22	1500	59	2 -PFL	1/4 Bsp M	819	28,89	10	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet		1/4 Bsp M



LANCES PFL- BENT - STAINLESS STEEL TUBE

P/N	Length		Hand Grip	Outlet	Weight			
	mm	in.			gr	oz		
40.9016.22	900	35,4	2 -PFL	1/4 Bsp M	568	20,03	10	
40.8217.22	1200	47,2	2 -PFL	1/4 Bsp M	686	24,2	10	


Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet		1/4 Bsp M



LANCE AL-F - MOULDED GRIP-STRaight - STAINLESS STEEL TUBE

P/N	Length		Hand Grip	Col.	Weight			
	mm	in.			gr	oz		
40.3500.22	500	19,7	AL-F 7,8 in	Gray	316	11,15	10	
40.3502.22	500	19,7	AL-F 7,8 in	Red	316	11,15	10	
40.3504.22	500	19,7	AL-F 7,8 in	Blue	316	11,15	10	✓
40.3900.22	1000	39,4	AL-F 12 in	Gray	568	20,03	10	
40.3902.22	1000	39,4	AL-F 12 in	Red	572	20,17	10	
40.3904.22	1000	39,4	AL-F 12 in	Blue	560	19,75	10	✓


Rated Pressure	250 bar - 25 MPa	3650 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	90 °C	194 °F
Sterilization Temperature	125 °C	255 °F
Tube type		1/4 Sst.
Inlet		1/4 Bsp M
Outlet		1/4 Bsp M



HANDLE AL-F 340 - MOULDED GRIP - STAINLESS STEEL TUBE

P/N	Length		Hand Grip	Col.	Weight			
	mm	in.			gr	oz		
40.3300.22	340	13,4	AL-F 12 in	Gray	300	10,6	10	
40.3302.22	340	13,4	AL-F 12 in	Red	300	10,6	10	
40.3304.22	340	13,4	AL-F 12 in	Blue	300	10,6	10	

Rated Pressure	250 bar - 25 MPa	3650 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	90 °C	194 °F
Sterilization Temperature	125 °C	255 °F
Tube type		1/4 Sst.
Inlet		1/4 Bsp M
Outlet		1/4 Bsp M

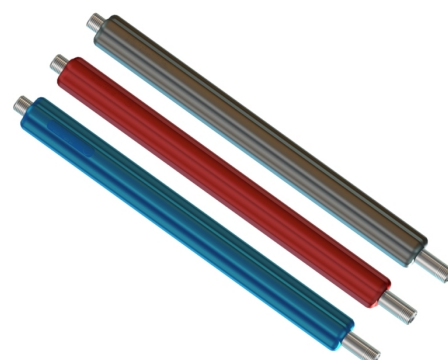



LANCE AL-F 39MPa - MOULDED GRIP-STRAIGHT - STAINLESS STEEL TUBE

P/N	Length		Hand Grip	Col.	Weight		
	mm	in.			gr	oz	
40.0231.22	800	31,5	AL-F 12 in	Blue	496	17,49	10
40.0232.22	1050	41,34	AL-F 12 in	Blue	610	21,52	10
40.0233.22	1200	47,24	AL-F 12 in	Blue	672	23,7	10



Rated Pressure	390 bar - 39 MPa	5700 psi
Rated Flow	50 l/min	13 USGpm
Rated Temperature	90 °C	194 °F
Sterilization Temperature	125 °C	255 °F
Tube type		1/4 Sst.
Inlet		1/4 Bsp M
Outlet		1/4 Bsp M

LANCE AL-F 55MPa - MOULDED GRIP-STRAIGHT - STAINLESS STEEL TUBE

P/N	Length		Hand Grip	Col.	Weight		
	mm	in.			gr	oz	
40.0221.22	1050	41,33	AL-F 12 in	Red	776	27,37	10
40.0222.22	1200	47,24	AL-F 12 in	Red	820	28,92	10



Rated Pressure	390 bar - 39 MPa	8000 psi
Rated Flow	50 l/min	13 USGpm
Rated Temperature	90 °C	194 °F
Sterilization Temperature	125 °C	255 °F
Tube type		1/4 Sst.
Inlet		1/4 Bsp M
Outlet		1/4 Bsp M

LANCE AL-F - ZINC-PLATED TUBE **NEW**

P/N	Length		Couplings	Weight		
	mm	in.		gr	oz	
40.0200.22	220	8,7	1/4 Bsp MM	128	4,5	50
40.0208.22	470	18,5	1/4 Bsp MM	274	9,66	50



Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

INSULATED HAND GRIP + TUBE -R5-S3

P/N	Length		Hand Grip	Tube type	Weight		
	mm	in.			gr	oz	
40.0370.00	380	15	S3	Z.pl.steel	384	13,54	30 ✓
40.0371.00	380	15	S3	Stainl. steel	346	12,2	30 ✓
40.5453.00	430	17	R5	Z.pl.steel	415	14,64	25 ✓



Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet	1/4 Bsp M (R5) - 1/4 Bsp M (S3)	
Outlet	1/4 Bsp F (R5) - 1/4 Bsp F (S3)	


LANCE PL4 - ZINC-PLATED TUBE

P/N	Length		Outlet	Type	Weight		
	mm	in.			gr	oz	
40.0072.10	800	31,5	1/4 Bsp M	Straight	1	1	25
Rated Pressure	250 bar - 25 MPa				3650 psi		
Permissible Pressure	280 bar - 28 MPa				4050 psi		
Rated Flow	40 l/min				10,5 USGpm		
Rated Temperature	160 °C				320 °F		
Inlet					3/8 Bsp M		
Tube type					1/4 z.pl.		



INSULATED GRIP ML-R5-S3-S4 **NEW**

P/N	Length		Hand Grip	Casing colour	Couplings	Weight		
	mm	in.				gr	oz	
40.5016.23	192	7,5	ML	Black	Hex.19 × d.13 mm	100	3,53	20
40.5020.23	290	11,4	ML	Black	Hex.19 × d.13 mm	144	5,08	40
40.5022.23	400	15,7	ML	Black	Hex.19 × d.13 mm	191	6,74	40
40.5024.23	440	17,3	ML	Black	Hex.19 × d.13 mm	208	7,34	40
40.0041.84	292	11,5	R5	Black	Hex.19 × d.13 mm	107	3,77	5
40.0044.84	292	11,5	R5	Blue	Hex.19 × d.13 mm	107	3,77	5
40.0043.84	292	11,5	R5	Red	Hex.19 × d.13 mm	107	3,77	5
40.0042.84	420	16,5	R5	Black	Hex.19 × d.13 mm	159	5,61	5
40.9995.98	300	11,8	S4	Black	Hex.19 × d.13 mm	120	4,23	20
40.0300.00	360	12,7	S3	Black	Hex.19 × d.13 mm	129	4,55	30
40.0300.05	360	12,7	S3	Black	Hex.19 × d.13,9 mm	136	4,8	30



Rated Temperature 160 °C 320 °F

TIP PROTECTOR

P/N	Col.	Weight			
		gr	oz		
40.0020.00	Black	19	0,67	10	✓
40.0020.30	Red	18	0,63	10	✓
40.0020.60	Blue	18	0,63	10	✓
40.0020.80	Gray	19	0,67	10	✓

Couplings 40.0007.51-61





EXTENSION - ZINC-PLATED TUBE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
40.5049.00	300	11,8	1/4 Bsp M	1/4 Npt F	197	6,95	50	
40.5060.00	500	19,7	1/4 Bsp M	1/4 Npt F	290	10,23	25	✓
40.5070.00	700	27,5	1/4 Bsp M	1/4 Npt F	405	14,2	30	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Lances with tip protector and nozzle holder.



EXTENSION - STAINLESS STEEL TUBE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
40.5069.00	500	19,7	1/4 Bsp M	1/4 Npt F	254	8,96	50	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Lances with tip protector and nozzle holder.



ZINC PLATED TUBE 1/4 BSP MM

P/N	Length		Outlet	Weight			
	mm	in.		gr	oz		
40.5056.66	200	7,9	1/4 Bsp M	96	3,39	100	
40.5050.66	300	11,8	1/4 Bsp M	160	5,6	50	✓
40.5033.66	400	15,7	1/4 Bsp M	198	6,98	25	
40.5055.66	500	19,7	1/4 Bsp M	246	8,68	50	
40.7602.66	600	23,6	1/4 Bsp M	298	10,51	100	
40.5702.66	700	27,5	1/4 Bsp M	364	12,84	25	
40.9421.66	800	31,5	1/4 Bsp M	430	15,2	25	
40.5902.66	900	35,4	1/4 Bsp M	450	15,87	25	
40.6008.66	1000	39,4	1/4 Bsp M	540	18,8	25	
40.8212.66	1200	47,2	1/4 Bsp M	590	20,81	25	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Inlet		1/4 Bsp M
Hose Ø	13 mm	0,511 in



ZINC PLATED TUBE 1/4 NPT MM

P/N	Length		Outlet	Weight			
	mm	in.		gr	oz		
40.0037.66	760	30	1/4 Npt M	400	14,1	25	
40.5904.66	900	35,4	1/4 Npt M	480	16,9	25	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Inlet		1/4 Npt M
Hose Ø	13 mm	0,511 in



STAINLESS STEEL TUBE 1/4 BSP MM

P/N	Length		Outlet	Weight			
	mm	in.		gr	oz		
41.0501.56	300	11,8	1/4 Bsp M	124	4,37	50	✓
40.5061.56	400	15,7	1/4 Bsp M	168	5,93	50	✓
40.0503.56	500	19,7	1/4 Bsp M	208	7,34	50	
40.7604.56	600	23,6	1/4 Bsp M	247	8,78	50	
40.7711.56	700	27,5	1/4 Bsp M	292	10,3	50	
40.8011.56	800	31,4	1/4 Bsp M	339	11,95	25	
40.9011.56	900	35,4	1/4 Bsp M	363	12,8	25	
40.6012.56	1000	39,9	1/4 Bsp M	422	14,88	25	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Inlet		1/4 Bsp M
Hose Ø	13 mm	0,511 in



STAINLESS STEEL TUBE 1/4 NPT MM

P/N	Length		Outlet	Weight			
	mm	in.		gr	oz		
40.0022.56	203	8	1/4 Npt M	83	2,9	200	
40.9014.56	400	15,7	1/4 Npt M	178	6,3	50	
40.8012.56	800	31,4	1/4 Npt M	322	11,4	25	
40.0024.56	1000	39,9	1/4 Npt M	417	14,7	25	
40.0023.56	1830	72	1/4 Npt M	770	27,16	25	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Inlet		1/4 Npt M
Hose Ø	13 mm	0,511 in





LD9 - WITH S3 VENTED GRIP

P/N	Length		Tube type	Outlet	Weight			
	mm	in.			gr	oz		
41.0905.00	690	27	1/4 Sst.	1/4 Npt F	934	32,94	10	✓
41.0805.00	890	35	1/4 z.pl.	1/4 Npt F	1300	45,85	10	✓
41.0806.00	890	35	1/4 Sst.	1/4 Npt F	1183	41,73	10	✓
41.0800.00	1090	43	1/4 z.pl.	1/4 Npt F	1528	53,89	10	✓
41.0900.00	1090	43	1/4 Sst.	1/4 Npt F	1347	47,51	10	✓
41.0850.00	1090	43	1/8 Sst.	1/4 Npt F	1208	42,61	10	
41.0902.00	1600	63	1/4 Sst.	1/4 Npt F	1851	65,29	3	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet		1/4 Bsp M



LD7/3 - WITH S3 VENTED GRIP

P/N	Length		Tube type	Outlet	Weight			
	mm	in.			gr	oz		
41.0600.00	1070	42,1	1/8 Sst.	1/4 Npt F	1106	39	10	
41.0630.00	890	35	1/4 z.pl.	1/4 Npt F	1223	43,14	10	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Hand Grip		S3
Inlet		1/4 Bsp M

LD7 - WITH R5 ROUND GRIP **NEW**

P/N	Inlet	Length		Tube type	Weight			
		mm	in.		gr	oz		
41.0682.00	1/4 Bsp M	1050	41,3	1/4 z.pl. × 1/8 Sst.	1060	37,4	10	
41.0682.05	1/4 Npt M	1050	41,3	1/4 z.pl. × 1/8 Sst.	1060	37,4	20	
41.0684.00	1/4 Bsp M	850	33,4	1/4 z.pl. × 1/8 Sst.	948	33,44	10	✓
41.0684.05	1/4 Npt M	850	33,4	1/4 z.pl. × 1/8 Sst.	948	33,44	20	
41.0672.00	1/4 Bsp M	1050	41,3	1/4 × 1/8 Sst.	1037	36,58	10	✓
41.0672.05	1/4 Npt M	1050	41,3	1/4 × 1/8 Sst.	1037	36,58	20	
41.0674.00	1/4 Bsp M	850	33,4	1/4 × 1/8 Sst.	922	32,52	10	
41.0674.05	1/4 Npt M	850	33,4	1/4 × 1/8 Sst.	922	32,52	20	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Hand Grip		R5
Outlet		1/4 Npt F



LD - WITH VERTICAL VALVE

P/N	Hand Grip	Length		Tube type	Weight			
		mm	in.		gr	oz		
41.0330.00	1-PFL	850	33,4	1/4 z.pl.	1006	35,48	15	✓
41.0340.00	R5	1050	41,3	1/4 z.pl.	1026	36,19	10	
41.0880.00	LD9+S3+knob	1090	43	1/4 z.pl.	1578	55,66	10	
41.0881.00	LD9+S3+knob	1090	43	1/4 Sst.	1365	48,14	10	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Outlet		1/4 Npt F
Inlet		1/4 Bsp M



LD9 - FRONT SECTION

P/N	Length		Tube type	Outlet	Weight			
	mm	in.			gr	oz		
41.0925.00	300	11,8	1/4 Sst.	1/4 Npt F	639	22,54	10	
Rated Pressure	250 bar - 25 MPa				3650 psi			
Permissible Pressure	280 bar - 28 MPa				4050 psi			
Rated Flow	40 l/min				10,5 USGpm			
Rated Temperature	160 °C				320 °F			
Inlet					1/4 Bsp F			



LD7 - FRONT SECTION

P/N	Length		Tube type	Outlet	Weight			
	mm	in.			gr	oz		
41.0698.00	220	8,7	1/8 Sst.	1/4 Npt F	442	15,6	10	✓
41.0390.00	500	19,7	1/8 Sst.	1/4 Npt F	650	22,93	10	
Rated Pressure	250 bar - 25 MPa				3650 psi			
Permissible Pressure	280 bar - 28 MPa				4050 psi			
Rated Flow	40 l/min				10,5 USGpm			
Rated Temperature	160 °C				320 °F			
Inlet					1/4 Bsp F			



LD9SST. AI303 - FRONT SECTION

P/N	Length		Tube type	Outlet	Weight			
	mm	in.			gr	oz		
41.0050.00	700	27,6	1/4 Sst.	1/4 Npt F	647	22,8	5	
Rated Pressure	250 bar - 25 MPa				3650 psi			
Permissible Pressure	280 bar - 28 MPa				4050 psi			
Rated Flow	40 l/min				10,5 USGpm			
Rated Temperature	160 °C				320 °F			
Material					Stainless steel 303			
Inlet					1/4 Bsp F			



LDM11 - COAXIAL BARREL - WITH S7 GRIP

P/N	Length		Tube type	Outlet	Weight			
	mm	in.			gr	oz		
41.0295.00	887	34,92	Stainl. steel	1/4 Npt F	1080	38,1	10	
41.0315.00	1087	42,8	Stainl. steel	1/4 Npt F	1221	43,07	10	
Rated Pressure	280 bar - 28 MPa				4050 psi			
Permissible Pressure	310 bar - 31 MPa				4500 psi			
Rated Flow	25 l/min				6,5 USGpm			
Rated Temperature	160 °C				320 °F			
Inlet					1/4 Bsp M			
Low pressure nozzle					40-30			



LD60SST. AI303 - FRONT SECTION - M24

P/N	Length		Tube type	Outlet	Weight			
	mm	in.			gr	oz		
41.0000.00	500	19,7	1/4 Sst.	1/4 Npt F	1631	57,5	1	
41.0000.70	700	27,6	1/4 Sst.	1/4 Npt F	1951	68,81	1	
Rated Pressure	600 bar - 60 MPa				8700 psi			
Permissible Pressure	660 bar - 66 MPa				9500 psi			
Rated Flow	40 l/min				10,5 USGpm			
Rated Temperature	43 °C				109 °F			
Material					Stainless steel 303			
Inlet					AR9 'A' - M24			
Hand Grip					30.5830.00			

